

## EVO Motion Detectors

Indoor



### DM70



**High-Security Motion Detector Module  
with Pet Immunity**

#### ► Features

- 2 x dual opposed element PIR sensors
- Auto-Pulse Signal Processing\* (APSP)
- Anti-tamper switch
- 4-wire bus connection

#### ► Specifications


Detection Range	11 x 11m (35 x 35 ft) at 90°
Pet Immunity	Up to 40 kg (90 lb)
Input Voltage	9 to 16 Vdc
Current Consumption	Typical: 16 mA, Maximum: 30 mA
Operating Temperature	-20 to 50 °C (-4 to 122 °F)
Dimensions	6.5 x 12.6 x 5.5 cm (2.6 x 4.9 x 2.2 in.)

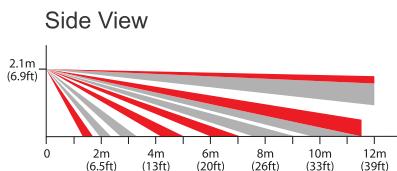

\* Patented

## EVO Motion Detectors

Digital Ceiling



### DG467



**360° Ceiling-Mounted Digital Motion Detector**

#### ► Features

- Dual element PIR sensor
- Anti-tamper switch
- Auto-Pulse Signal Processing\* (APSP)
- 4-wire bus connection

#### ► Specifications

Detection Range	7 x 6m (24 x 20 ft) at 2.4m (8 ft); 11 x 6m (35 x 20 ft) at 3.7m (12 ft)
Input Voltage	9 to 16 Vdc
Current Consumption	Typical: 29 mA
Alarm Output Available	Form A relay, N.C.
Operating Temperature	-20 to 50 °C (-4 to 122 °F)
Dimensions	10.8 diameter x 13.5 cm depth (4.25 x 1.38 in.)



\* Patented