

## Wireless Motion Detectors

### Indoor



## PMD2P

### Wireless PIR Motion Detector with Pet Tolerance


#### ► Features

- Dual element PIR sensor
- Auto-Pulse Signal Processing\* (APSP) with Automatic Temperature Compensation
- Dual tamper mechanism (wall / cover)
- Can be used with SB469 Swivel-Mount Bracket


#### ► Specifications

Detection Range	11 x 11m (36 x 36 ft), 15m (50 ft) for center beams; 88.5°
Pet Tolerance	Up to 18 kg (40 lb)
Power	3 x AAA alkaline batteries
Battery Life	2 years
RF Frequency	433 or 868 MHz
Operating Temperature	0 to 50 °C (32 to 122 °F)
Dimensions / Weight	6.5 x 12.5 x 5.2 cm (2.5 x 4.9 x 2.0 in.) / 105g (3.7 oz) with batteries

Top View

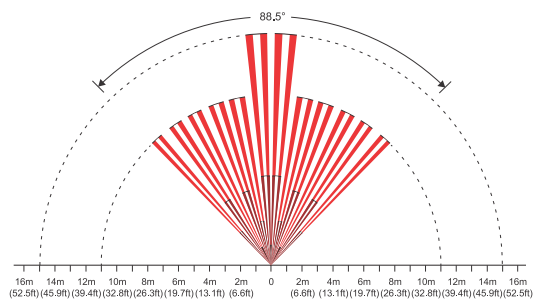

Side View



## PMD75

### Wireless Digital Dual-Optic PIR Motion Detector with Pet Immunity


#### ► Features

- 2 x Dual-opposed element PIR sensors
- Auto-Pulse Signal Processing\* (APSP) with Automatic Temperature Compensation
- Anti-tamper switch
- Digital motion detection
- Digital Shield algorithm software, with adjustable sensitivity
- Can be used with SB469 Swivel-Mount Bracket


#### ► Specifications

Detection Range	11 x 11m (36 x 36 ft), 15m (50 ft) for center beams; 90°
Pet Immunity	Up to 40 kg (90 lbs)
Power	3 x AAA alkaline batteries
Battery Life	2 years
RF Frequency	433 or 868 MHz
Operating Temperature	0 to 50 °C (32 to 122 °F)
Dimensions	6.6 x 12.4 x 6.1 cm (2.6 x 4.9 x 2.4 in.)

Top View

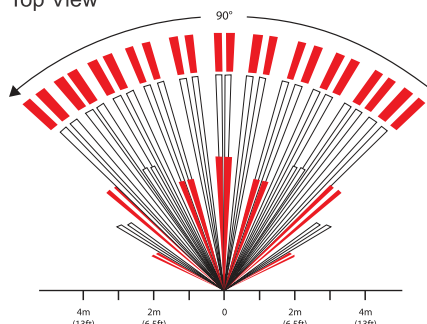

Side View

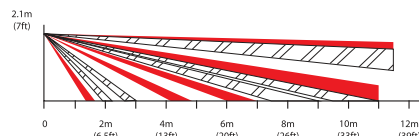

EN 50131  
GRADE 2

EN 50130-5  
CLASS 1

EN 45011  
SYSTEM 5

\* Patented



\* Patented