

# MinuteBank

## VRLA AGM Battery

BT-HSE-100-12 [12V100Ah]



### General Features

- Designed floating charging service life: 12 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion


### Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipments
- Emergency lighting systems

### Physical Specifications

Nominal Voltage	Nominal Capacity (20HR)	Dimension				Weight ±3%	Internal Resistance (In full charge status)	Standard Terminals
		L	W	H	TH			
12V	100AH	331±3mm	173±2mm	216±3mm	222±3mm	Approx 30.0kg (62.83lbs)	≈4.60 mΩ	T13 (standard)

### Dimensions

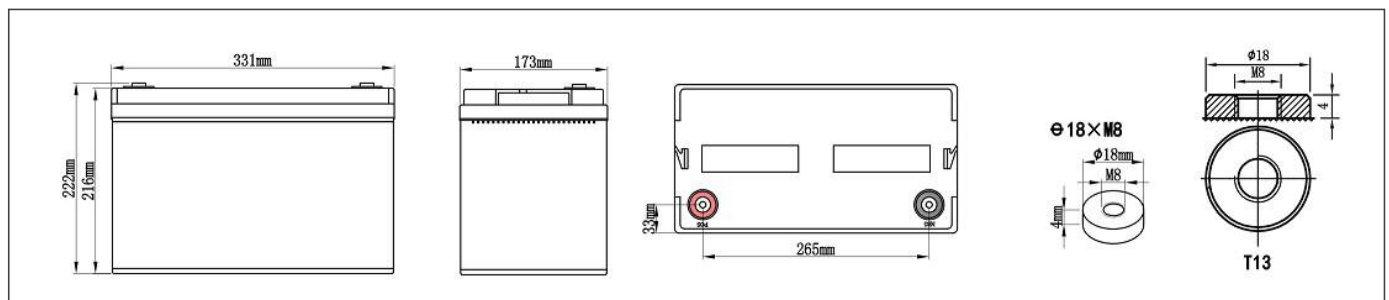

### Battery Discharge Table

End Voltage (V)	Minute (M)						Hour (H)									
	5	10	15	20	30	45	1	1.5	2	3	4	5	6	8	10	20
<b>Constant Current Discharge Data Sheet (Amperes at 25°C)</b>																
10.20	315	240	181	158	95.9	89.0	62.5	49.4	41.3	25.9	22.6	17.99	16.30	12.80	10.80	5.65
10.50	280	220	169	152	92.0	85.0	60.0	47.4	39.8	25.1	22.1	17.18	15.51	12.10	10.50	5.55
10.80	260	200	158	148	88.9	81.0	57.5	45.5	38.3	24.2	21.5	16.44	14.80	11.50	10.20	5.38
<b>Constant Power Discharge Data Sheet (Watt at 25°C)</b>																
10.20	3130	2650	1907	1700	1198	900	782	570	429	320	262	206	190	153	130	68.1
10.50	3010	2250	1712	1660	1171	880	770	562	415	310	254	200	186	151	126	66.0
10.80	2800	2100	1635	1635	1145	850	735	536	401	299	245	193	181	149	120	64.5

**NOTE :** The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation

## Constant-Voltage Charge

Rated Capacity	
20 hour rate (5.0A)	118.0AH
10 hour rate (10.0A)	105.0AH
5 hour rate (17.0A)	88.0AH
3 hour rate (25.0A)	82.0AH
1 hour rate (60.0A)	65.0AH

Capacity affected by Temperature	
40°C(104°C)	103%
25°C(77°C)	100%
0°C(32°C)	86%

Cycle Application
1. Limit initial current less than 30.0A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77 °F)
3. Hold at 14.1V to 14.4V until current drop to under 0.60A for at least 3 hours.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.

Standby Service
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 25.0A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.

## Performance Characteristics

