


MD Access Pro Access Applications

- » High functionality
- » Safe control unit according to EN 13849
- » Award-winning product design
- » Only 25 W of power consumption (Magnetic.Access)
- » High ease of use / maximum accessibility
- » 10 million opening and closing cycles
- » For lane widths up to 3.5 m

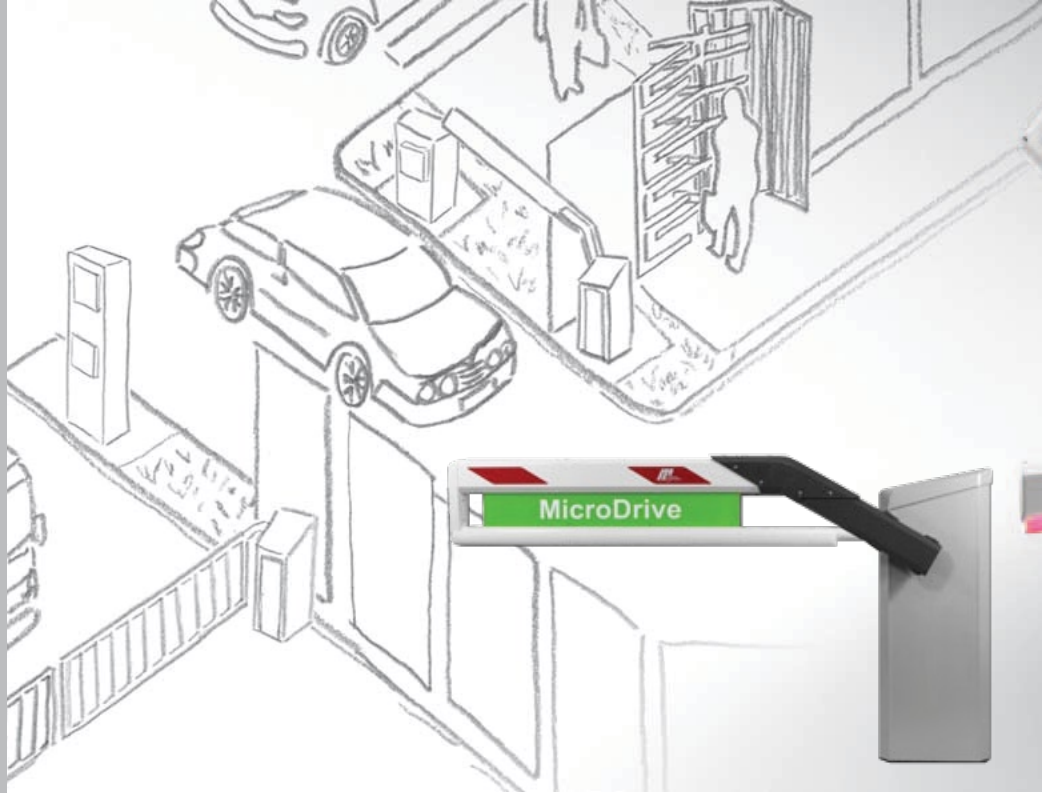

The Magnetic.Access Pro barriers offer even faster opening times (of 1.3 sec) and are thus ideally suited for usage in applications with a high volume of traffic. Compared to Magnetic.Access barriers, the pro models offer even more functionalities, additional expandability through plug-in modules and exclusive accessories.

Magnetic.Access Pro barriers are available in three colour combinations.

They contain the complete operator, the control unit MGC Pro, an integrated 2-channel loop detector module as well as the VarioBoom.

Specifications

Lane width max.	3.0 m
Opening / closing time	0.9 s
Power consumption max.	95 W
Duty cycle	100%
Supply voltage	Wide voltage range 85 - 264 V AC
Frequency	50 - 60 Hz
Drive system	MHTM™ MicroDrive
Housing dimensions (WxDxH)	315 x 360 x 1115 mm
Weight (without boom)	42 kg
Housing design	Powder-coated aluminium
Base frame	Powder-coated stainless steel
Protection class	IP 54
Compliant with	2004/108/EG, 2006/42/EG, 305/2011, CE, UL 325
Temperature range	-30 to +55 °C

Dimensions

