


MAXTRON EPR SERIES

3P/1P, PF1.0, 10kVA - 20kVA



Adjustable LCD/LED panel

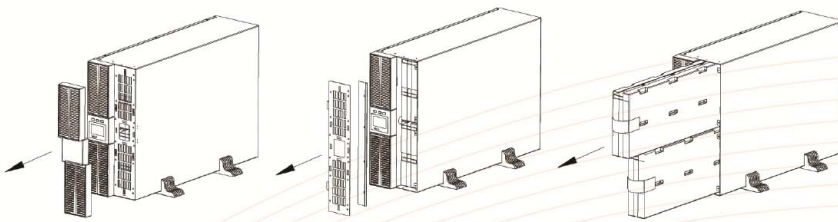

Easy for maintenance hot-swappable battery (10kVA)



Features

- Advanced DSP and 3-level technology
- Output power factor 1.0
- Active power factor correction (APFC), Input power factor up to 0.99
- High efficiency 95% (up to 98% in ECO mode)
- Advanced digital parallel technology
- 3:1 to 1:1 model settable
- Wide input voltage range (190 ~ 478 Vac) and frequency range (40 ~ 70 Hz)
- 50/60 Hz frequency auto sensing
- Two modes of frequency conversion: 50Hz input / 60Hz output or 60Hz input / 50Hz output
- Dual-Input design, supporting independent bypass
- Hot-swappable battery (10kVA)
- Flexible battery configuration (settable 16-20 pcs batteries)
- Digitally controlled charger
- High charging current available (Max. 10A)
- Charging voltage and current configured by demands
- Linear derating in low voltage input reducing battery discharging times, extending the service life of battery
- Intelligent battery management, automatic floating / equalizing charge control, charger domancy control, increasing battery life by 50%
- Ability to switch on the UPS with batteries
- Settable delayed start time when mains power is restored, reducing the impact on power grid or generator
- Fans speed varies intelligently with temperatures, reducing noise and extending its service life
- Equipped with self-aging function
- Compact internal layout, miniaturized the complete unit for small footprint
- LCD+LED display, multi-funtional keys operation, friendly human-machine interface
- Powerful background software for parameter configuration
- Advanced multi-platform communications RS232, USB, RS485, SNMP and dry contacts communication interfaces
- Effective software and hardware protection function, robust self-diagnostic function, and abundant event log for check

Available Options

- RS232 and smart card slot included
- Optional parallel function, battery temperature compensation, SNMP card, USB, RS485 card, dry contacts, EMD and SMS alarms




TRUE ONLINE UPS


MAXTRON EPR SERIES

Rear panel


- | | |
|-----------------------------|-------------------------------------|
| 1. Intelligent Slot | 7. Temperature Detection (optional) |
| 2. Fans | 8. GND |
| 3. Parallel Port (optional) | 9. Bypass Breaker |
| 4. RS232 | 10. Terminal and Cover |
| 5. EPO | 11. Battery Pack |
| 6. USB (optional) | |



10 kVA (H) (3:1)



15/20 kVA (H) (3:1)



10 kVA (S) (3:1)

MODEL	MX 10000EPR	MX 15000EPR	MX 20000EPR
Capacity	10kVA / 10kW	15kVA / 15kW	20kVA / 20kW
INPUT			
Input wiring	Three-phase five-wire (3φ + N + PE)		
Rated voltage	380 / 400 / 415 vac		
Voltage range	190 ~ 304 Vac (linear derating between 50% and 100% load); 304 ~ 478 Vac (no derating)		
Rated frequency	50 / 60Hz (auto-sensing)		
Frequency range	40 ~ 70Hz		
Power factor	≥ 0.99		
Bypass voltage range	- 40% ~ + 15% (settable)		
Total harmonic distortion (THDi)	≤ 5%		
OUTPUT			
Output wiring	Single-phase (L - N)		
Rated voltage	208 (PF=0.9) / 220 / 230 / 240 Vac		
Voltage regulation	± 1 %		
Frequency	Synchronized to bypass in mains mode; 50 / 60Hz ± 0.1% Hz in battery mode		
Waveform	Sinusoidal		
Power factor	1		
Total harmonic distortion (THDv)	≤ 1% (linear load); ≤ 3% (non-linear load)		
Crest factor	3:1		
Overload	102% ~ 110% for 10 min, 110% ~ 125% for 1 min, 125% ~ 150% for 30s		
BATTERIES			
DC voltage	192 Vdc (192 ~ 240 Vdc settable)		
Number of battery	16pcs (16 ~ 20 settable)		
Built-in battery (standard model)	12V / 9Ah x 16	/	/
Charging current	Standard model: 1A; Long time model: 5A (default), 1 ~ 5A settable; 10A (optional)		
Recharge time	Standard model: 90% capacity restored in 8 hours; Long time model: depend on the capacity of battery		
SYSTEM			
Efficiency	≥ 94% at 100% load, max. 95% at 60% load, ≥ 98% in ECO mode		
Transfer time	0ms		
Protections	Short-circuit, overload, over-temperature, battery low voltage, over-voltage, under-voltage and fan failure		
Max. number of parallel connections	4		
Communications	RS232 (standard), USB / RS485 / dry contacts / SNMP / battery temperature compensation (optional)		
Display	LCD + LED		
OTHERS			
Operating temperature	0°C ~ 40°C		
Storage temperature	- 25°C ~ 55°C (without battery)		
Relative humidity	0 ~ 95% (non-condensing)		
Altitude	≤ 1000m, derating 1% for each additional 100m		
IP rating	IP 20		
Noise level at 1 m	≤ 58 dB		
Dimensions (W x D x H) (mm)	440 x 650 x 88 (H) 440 x 660 x 176 (S)	440 x 780 x 132	
Packaged dimensions (W x D x H) (mm)	514 x 696 x 168 (H) 554 x 792 x 418 (S)	554 x 792 x 400	
Net weight (kg)	17 (H), 67 (S)	25.5	
Gross weight (kg)	19 (H), 77 (S)	28	

- S means standard model; H means long time model.
- All specifications are subject to change without notice.



POWER LOGIC