

BR600T_Rubber Lining LED Light Straight Arm Barrier Gate



Date: 14 Mar 2021


General Description

The rubber lining LED light can be easily installed underneath the straight barrier arm. Its standard length is 3.5m, but can be easily trim to shorter length according to customer requirement.

The lightweight make it easier to carry with minimum manpower and will not make the barrier arm too heavy when installed underneath.

The high quality rubber materials make it more durable and not easily broken. It is also suitable to install at outdoor environment.

RED light indicate standby mode where barrier arm is down (close). GREEN light indicate valid access mode where barrier arm is up (open).


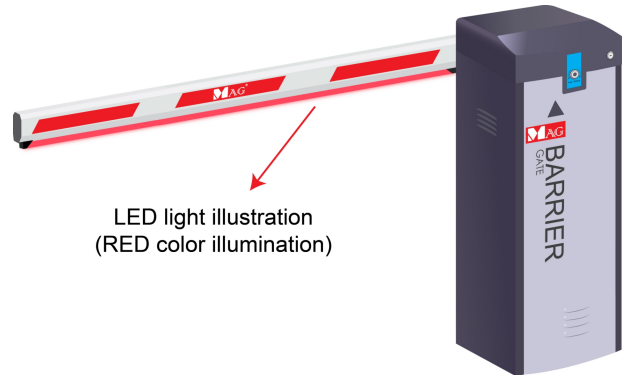


LED light illustration
(RED color illumination)

Technical specification

Description	Parameter
Length	3.5 meter (flexible to cut shorter)
LED light materials	60pcs - Bead LED
LED light colour	Red and Green
Housing materials	Rubber
Power supply input	12V - 1.3A
Power consumption	16 watts (3.5meter)
Weight	1.2kg
Dimension	21 x 23 x 3500mm

Dimension

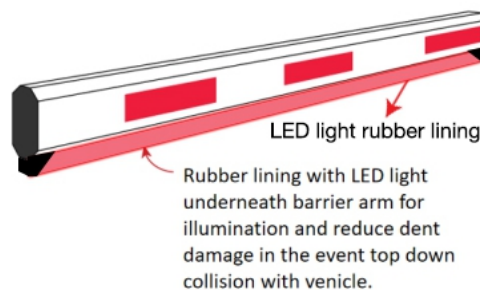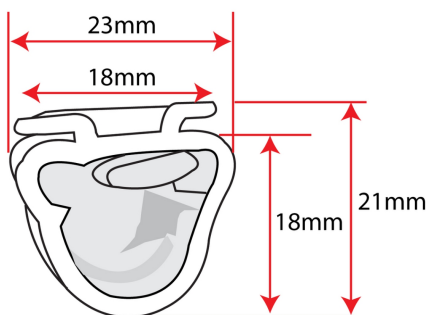

Disclaimers

Applications that are described herein for any of these products are for illustrative purposes only. Drawing does not necessary reflect exact assembly/installation. MAG makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

MAG reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. MAG assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or masks work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

© MAG. All rights reserved.